


1	Operating Voltage:	VDD=3.3V typ. TVDD=3.3V typ.
2	Resolution:	1024RGB*600
3	Color:	16.7M
4	Interface:	LVDS
5	Display type:	Transmissive,NB
6	Viewing Direction:	ALL
7	Operating Temp:	-20°C~70°C
8	Storage Temp:	-30°C~80°C
9	Driver IC:	HX8282-A/HX8696-A
10	TPP Drive IC	G79271
11	Surface Luminance:	340cd/m2(typ.)
12	Unspecified tolerance:	±0.3

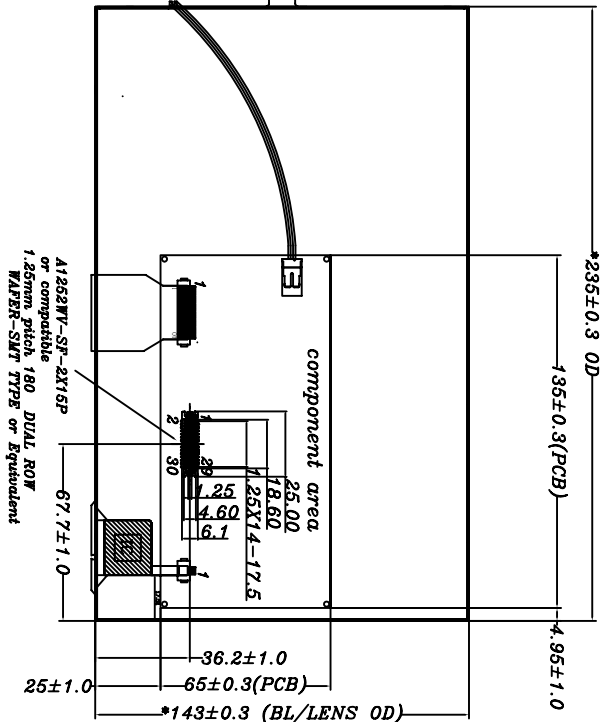

1	PDN	16	Reset2-
2	SHLR	17	Reset2+
3	RESET	18	GN
4	STBYB	19	Reset3-
5	VDD	20	Reset3+
6	GN	21	GN
7	ResetCln-	22	HS
8	ResetCln+	23	VLED
9	GN	24	PM
10	Reset0-	25	TCN
11	Reset0+	26	VDD
12	GN	27	TSCL
13	Reset1-	28	TSDA
14	Reset1+	29	TRESET
15	GN	30	TINT