

LISA3-O-PIN

~15° x 50° oval beam with location pin installation

TECHNICAL SPECIFICATIONS:

Dimensions	Ø 10.0 mm
Height	7.9 mm
Fastening	glue
ROHS compliant	yes ⓘ




MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish
LISA3-O	Single lens	PMMA	clear	
LISA3-HLD-PIN	Holder	PC	black	

ORDERING INFORMATION:

Component		Qty in box	MOQ	MPQ	Box weight (kg)
FP16563_LISA3-O-PIN	Single lens	2000	300	100	1.3
» Box size: 310 x 230 x 60 mm					

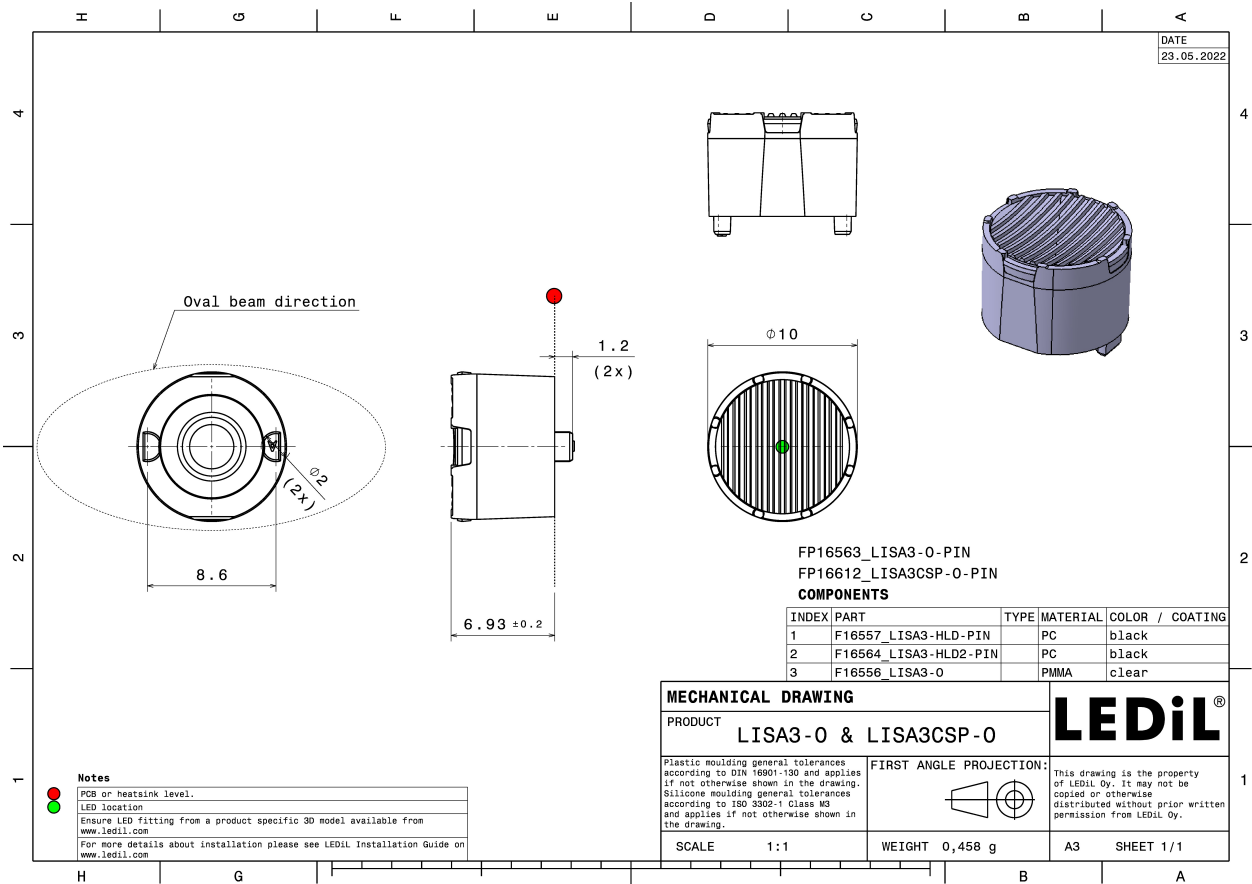


See also our general installation guide: www.ledil.com/installation_guide


PHOTOMETRIC DATA (MEASURED):





LED XD16
FWHM / FWTM 45.0 + 20.0° / 78.0 + 43.0°
Efficiency 65 %
Peak intensity 1.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:

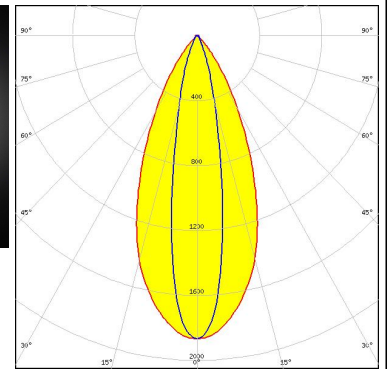



LED XP-E2
FWHM / FWTM 48.0 + 20.0° / 79.0 + 41.0°
Efficiency 78 %
Peak intensity 2.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:

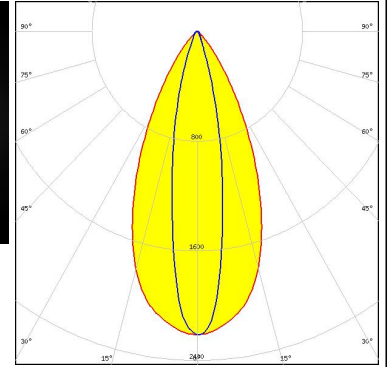

LED LUXEON CZ
FWHM / FWTM 49.0 + 14.0° / 76.0 + 31.0°
Efficiency 76 %
Peak intensity 3.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:

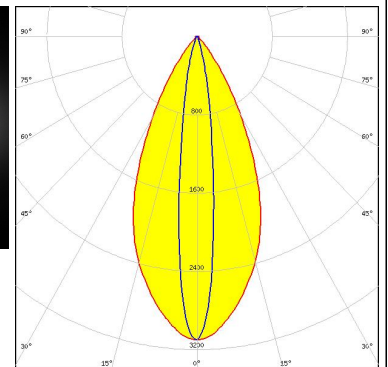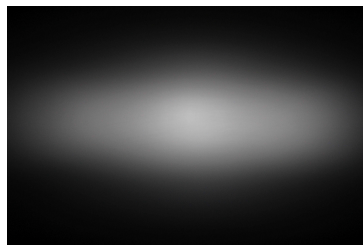



LED NF2x757G
FWHM / FWTM 33.0° / 64.0°
Efficiency 66 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

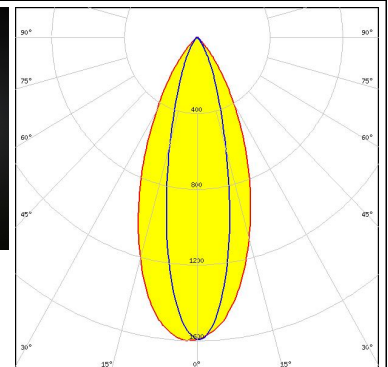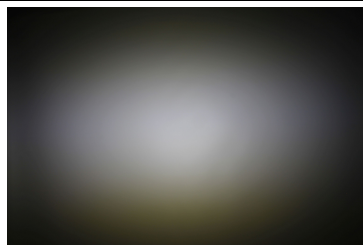



PHOTOMETRIC DATA (MEASURED):





LED NVSW219F
 FWHM / FWTM 45.0 + 29.0° / 81.0 + 58.0°
 Efficiency 77 %
 Peak intensity 1.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

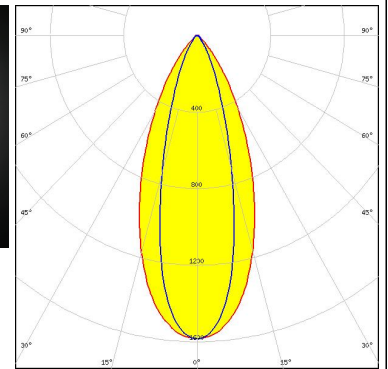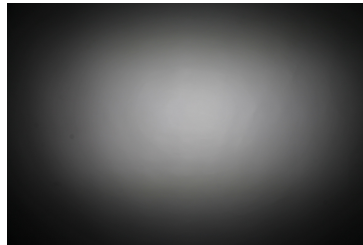



LED OSCONIQ C 2424
 FWHM / FWTM 44.0 + 20.0° / 77.0 + 43.0°
 Efficiency 74 %
 Peak intensity 2.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

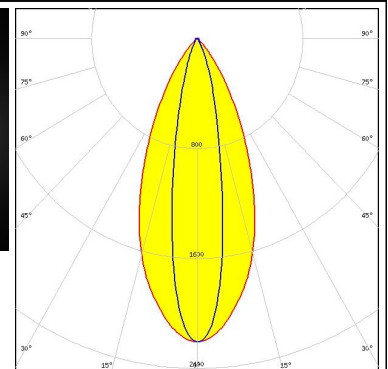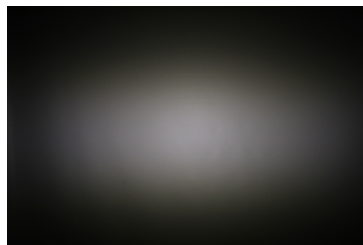

LED OSLON Square CSSRM2/CSSRM3
 FWHM / FWTM 46.0 + 24.0° / 80.0 + 50.0°
 Efficiency 75 %
 Peak intensity 1.8 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

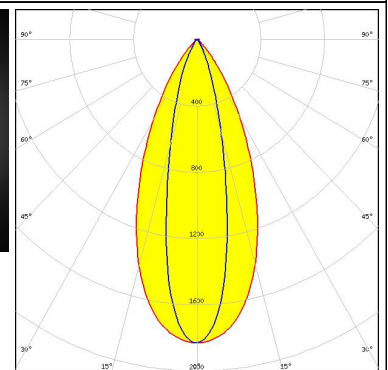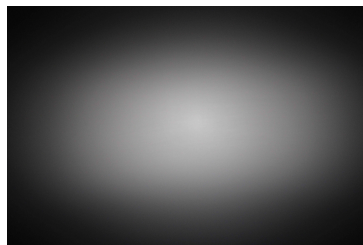

LED LH351C
 FWHM / FWTM 45.0 + 28.0° / 81.0 + 59.0°
 Efficiency 77 %
 Peak intensity 1.6 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

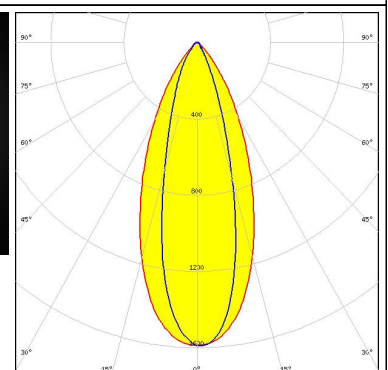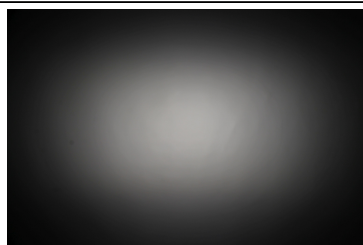


PHOTOMETRIC DATA (MEASURED):




PHOTOMETRIC DATA (SIMULATED):




LED J Series 2835
 FWHM / FWTM 46.0 + 22.0° / 78.0 + 48.0°
 Efficiency 81 %
 Peak intensity 2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

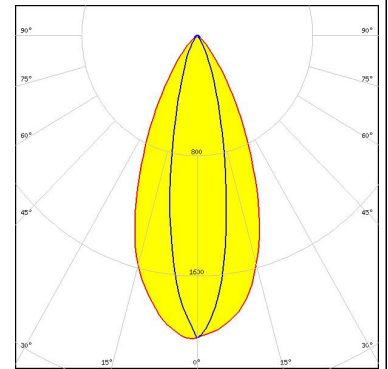


LED J Series 2835
 FWHM / FWTM 48.0 + 20.0° / 78.0 + 44.0°
 Efficiency 82 %
 Peak intensity 2.2 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

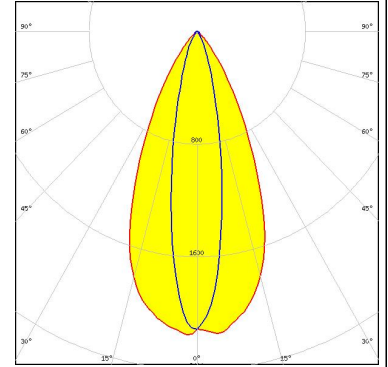

LED XP-E
 FWHM / FWTM 17.0 + 48.0° / 36.0 + 74.0°
 Efficiency 85 %
 Peak intensity 2.7 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

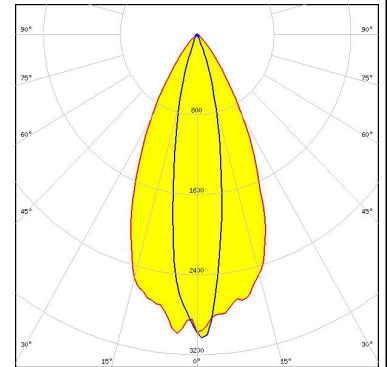


LED XP-G2
 FWHM / FWTM 46.0 + 22.0° / 78.0 + 46.0°
 Efficiency 83 %
 Peak intensity 2.3 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

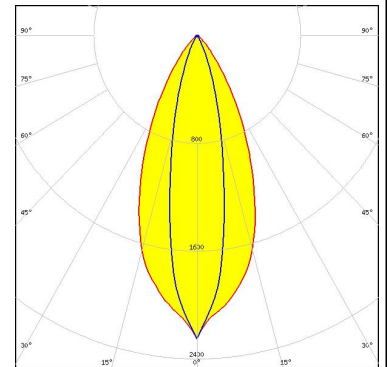



PHOTOMETRIC DATA (SIMULATED):




LED XP-G2 HE
 FWHM / FWTM 46.0 + 29.0° / 84.0 + 61.0°
 Efficiency 77 %
 Peak intensity 1.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

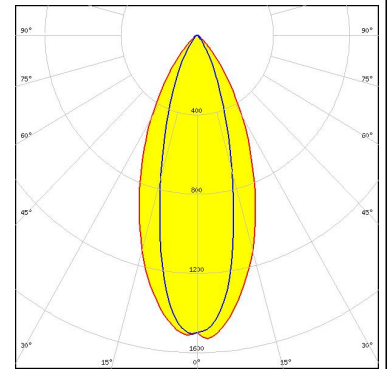


LED XP-G3
 FWHM / FWTM 44.0 + 29.0° / 81.0 + 59.0°
 Efficiency 73 %
 Peak intensity 1.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

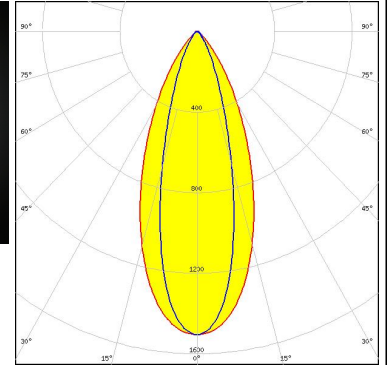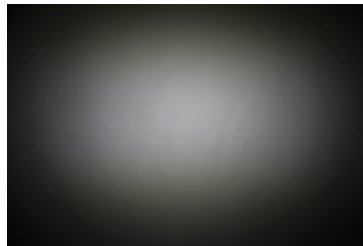

LED LUXEON TX
 FWHM / FWTM 22.0 + 46.0° / 46.0 + 80.0°
 Efficiency 80 %
 Peak intensity 2.1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

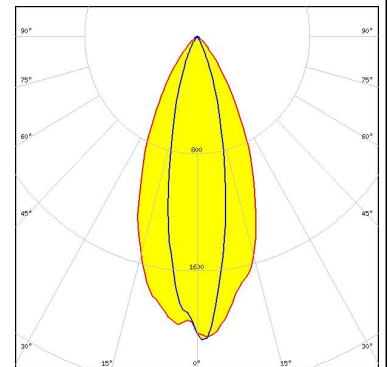


LED LUXEON V2
 FWHM / FWTM 25.0 + 47.0° / 53.0 + 81.0°
 Efficiency 83 %
 Peak intensity 1.9 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

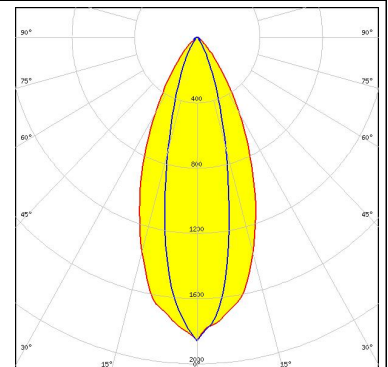


PHOTOMETRIC DATA (SIMULATED):




LED LUXEON Z
FWHM / FWTM 12.0 + 50.0° / 25.0 + 74.0°
Efficiency 84 %
Peak intensity 3.3 cd/lm
LEDs/each optic 1
Light colour White
Required components:

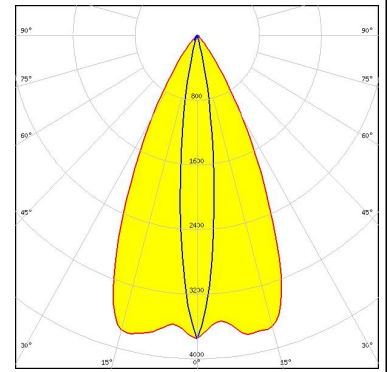


LED LUXEON Z ES
FWHM / FWTM 17.0 + 49.0° / 34.0 + 76.0°
Efficiency 84 %
Peak intensity 2.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:

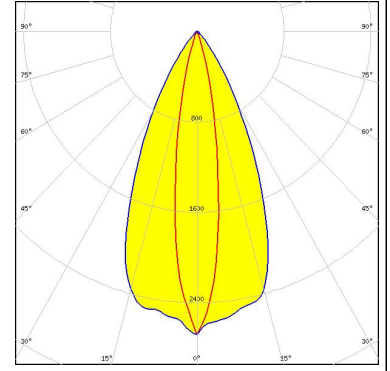

LED SST-20
FWHM / FWTM 48.0 + 20.0° / 78.0 + 41.0°
Efficiency 81 %
Peak intensity 2.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:

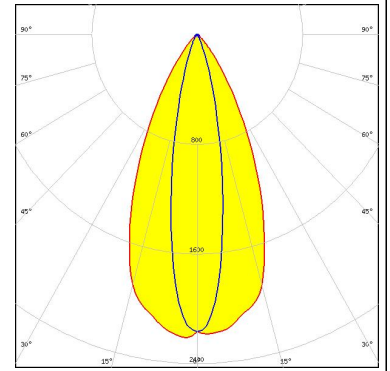

LED NVSxx19B/NVSxx19C
FWHM / FWTM 25.0 + 45.0° / 52.0 + 81.0°
Efficiency 78 %
Peak intensity 1.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:

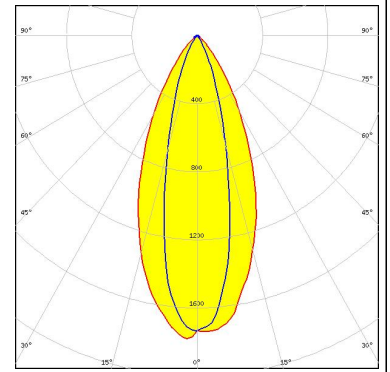


PHOTOMETRIC DATA (SIMULATED):

OSRAM

Opto Semiconductors


LED Duris S5 (2 chip)
 FWHM / FWTM 20.0 + 45.0° / 40.0 + 75.0°
 Efficiency 80 %
 Peak intensity 2.1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

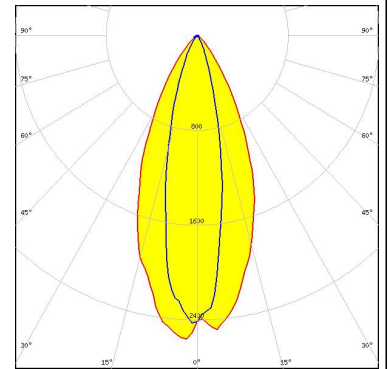

OSRAM

Opto Semiconductors


LED Duris S5 (Single chip)
 FWHM / FWTM 19.0 + 45.0° / 40.0 + 75.0°
 Efficiency 79 %
 Peak intensity 2.1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

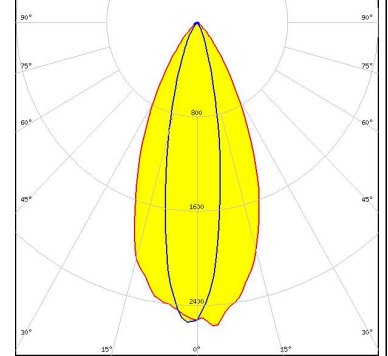

OSRAM

Opto Semiconductors


LED OSCONIQ P 3030
 FWHM / FWTM 50.0 + 17.0° / 75.0 + 34.0°
 Efficiency 79 %
 Peak intensity 2.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

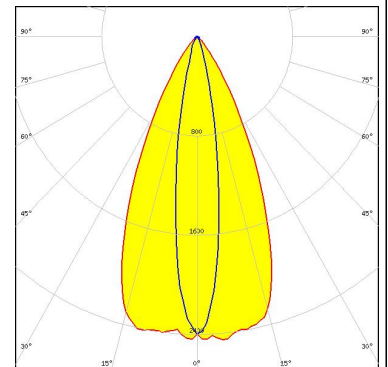

OSRAM

Opto Semiconductors

LED OSOLON SSL 150
 FWHM / FWTM 16.5 + 48.0° / 36.0 + 76.0°
 Efficiency 83 %
 Peak intensity 2.8 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

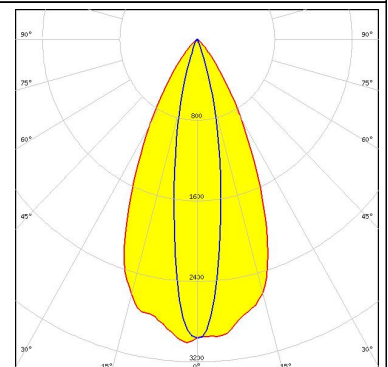


PHOTOMETRIC DATA (SIMULATED):

OSRAM

Opto Semiconductors


LED OSLON SSL 80
FWHM / FWTM 16.0 + 45.0° / 38.0 + 72.0°
Efficiency 81 %
Peak intensity 2.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:

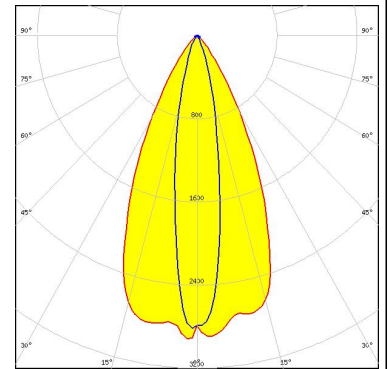

OSRAM


Opto Semiconductors

LED SYNIOS S2222
FWHM / FWTM 50.0 + 18.0° / 77.0 + 36.0°
Efficiency 95 %
Peak intensity 2.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:

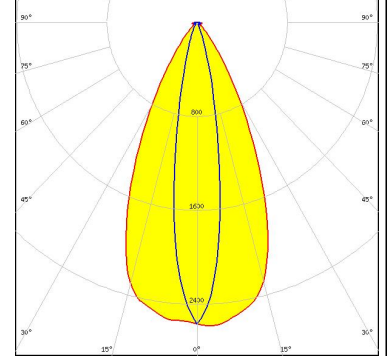


SAMSUNG

LED LM101B
FWHM / FWTM 14.5 + 50.0° / 29.0 + 72.0°
Efficiency 81 %
Peak intensity 2.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:

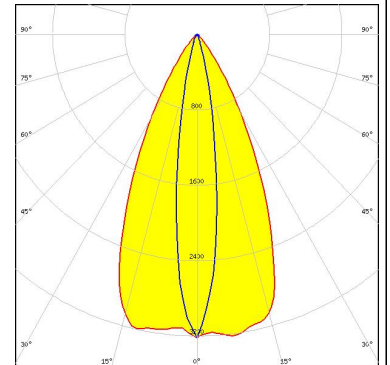

SAMSUNG




LED LM301A
FWHM / FWTM 16.0 + 50.0° / 40.0 + 75.0°
Efficiency 81 %
Peak intensity 2.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

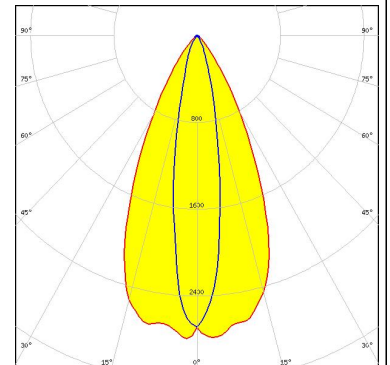


PHOTOMETRIC DATA (SIMULATED):




LED FWR1108MS
 FWHM / FWTM 48.0 + 20.0° / 76.0 + 40.0°
 Efficiency 84 %
 LEDs/each optic 1
 Light colour IR
 Required components:

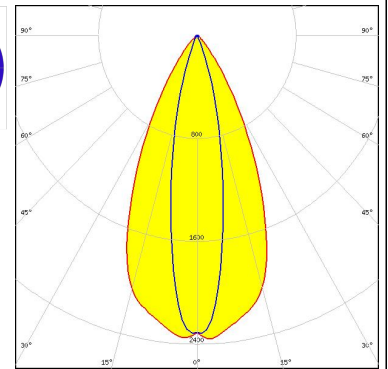




LED MFN1108MS
 FWHM / FWTM 50.0 + 14.0° / 72.0 + 37.0°
 Efficiency 84 %
 Peak intensity 2.9 cd/lm
 LEDs/each optic 1
 Light colour IR
 Required components:

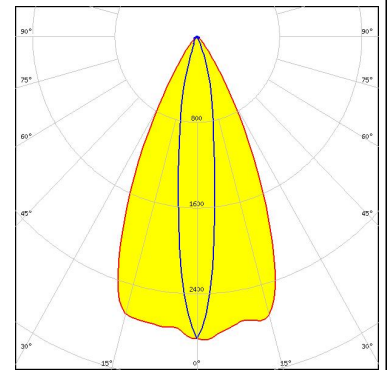

LED MGN1108MS
 FWHM / FWTM 50.0 + 14.0° / 72.0 + 36.0°
 Efficiency 84 %
 Peak intensity 3 cd/lm
 LEDs/each optic 1
 Light colour IR
 Required components:

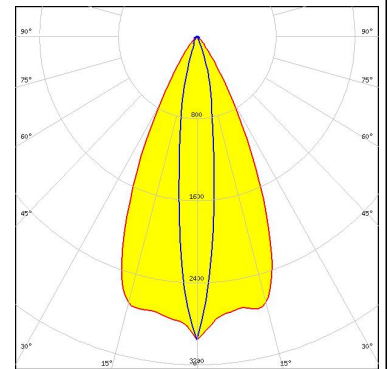

LED MJN1108MS
 FWHM / FWTM 48.0 + 19.0° / 76.0 + 39.0°
 Efficiency 85 %
 LEDs/each optic 1
 Light colour IR
 Required components:

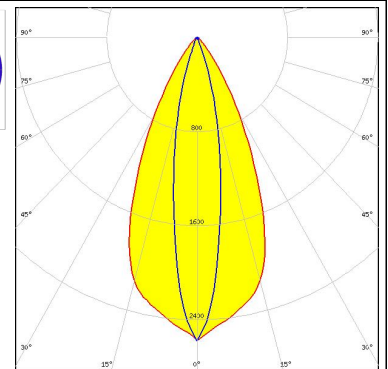

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)