

STRADA-2X2MX-8-VSM

IESNA Type V (square) for wide areas lighting
such as car parks. New revision.

TECHNICAL SPECIFICATIONS:

Dimensions	90.0 x 90.0 mm
Height	13.1 mm
Fastening	screw
Ingress protection classes	IP67
ROHS compliant	yes ⓘ




MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish
STRADA-2X2MX-8-VSM	Multi-lens	PMMA	clear	
STRADA-2X2MX-8-SEAL	Seal	Silicone	clear	

ORDERING INFORMATION:

Component		Qty in box	MOQ	MPQ	Box weight (kg)
CS15763_STRADA-2X2MX-8-VSM	Multi-lens	156	52	52	8.6
» Box size: 480 x 280 x 300 mm					

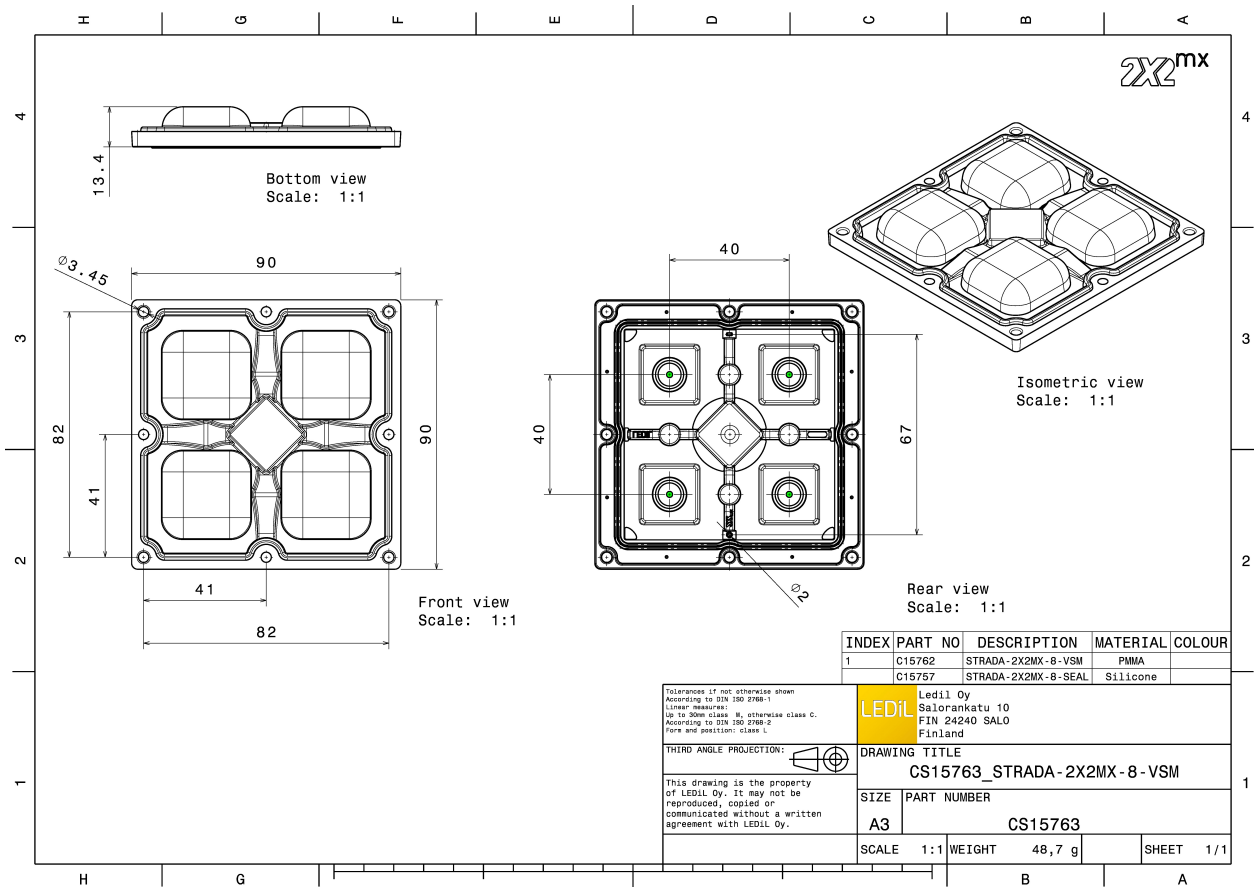


See also our general installation guide: www.ledil.com/installation_guide

PHOTOMETRIC DATA (MEASURED):


CREE LED

LED XHP50.2
FWHM / FWTM 151.0° / 159.0°
Efficiency 94 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

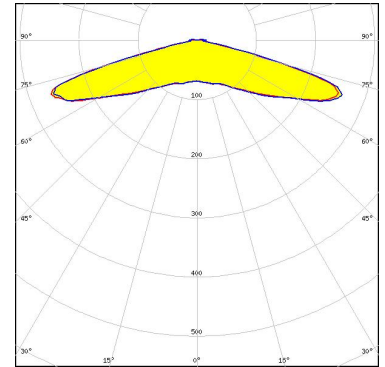


CREE LED

LED XT-E HE
FWHM / FWTM 148.0° / 156.0°
Efficiency 94 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

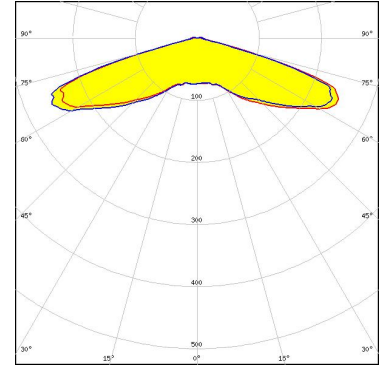


LUMILEDS

LED LUXEON M/MX
FWHM / FWTM Asymmetric
Efficiency 94 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

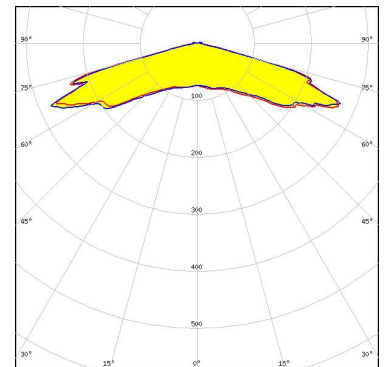

LUMILEDS



LED LUXEON XR-7070
FWHM / FWTM 147.0° / 156.0°
Efficiency 97 %
Peak intensity 0.4 cd/lm
LEDs/each optic 1
Light colour White
Required components:

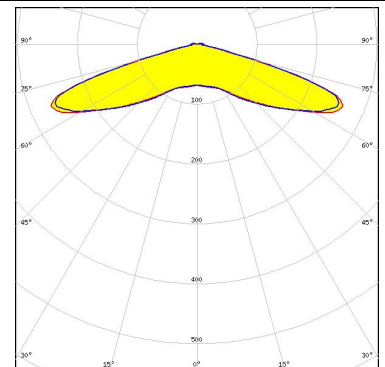


PHOTOMETRIC DATA (MEASURED):




LED NV9W149AM
 FWHM / FWTM Asymmetric
 Efficiency 94 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

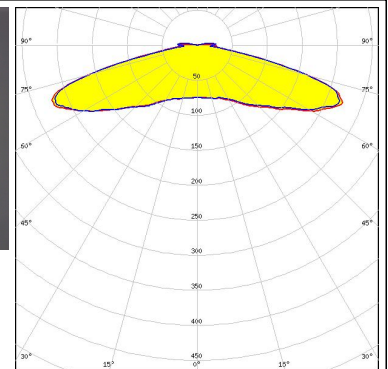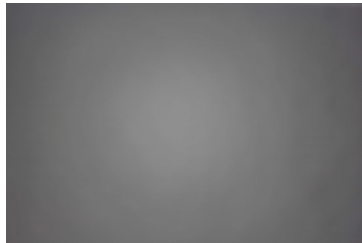

LED PrevaLED Brick HP 2x2MX
 FWHM / FWTM 145.0° / 153.0°
 Efficiency 96 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 4
 Light colour White
 Required components:

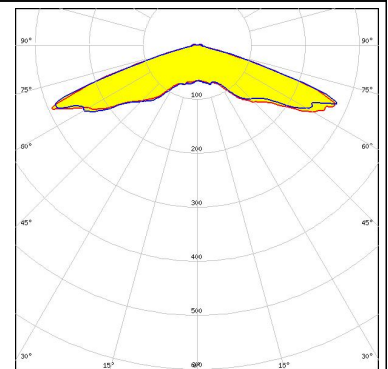

LED HiLOM SC16 (LH181B)
 FWHM / FWTM 140.0° / 147.0°
 Efficiency 94 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

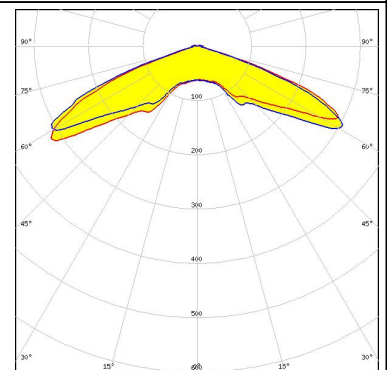


LED PAL-LK-4950-740-48
 FWHM / FWTM 150.5 + 151.0° / 159.5 + 159.0°
 Efficiency 97 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

PHOTOMETRIC DATA (MEASURED):


SCIOLUX

LED XLE-S22C4XD16 (XD16)
 FWHM / FWTM Asymmetric
 Efficiency 94 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 4
 Light colour White
 Required components:

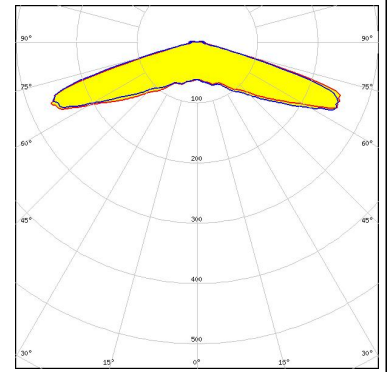


SCIOLUX

LED XLE-S22C4XTEHE (XT-E HE)
 FWHM / FWTM 148.0° / 156.0°
 Efficiency 94 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

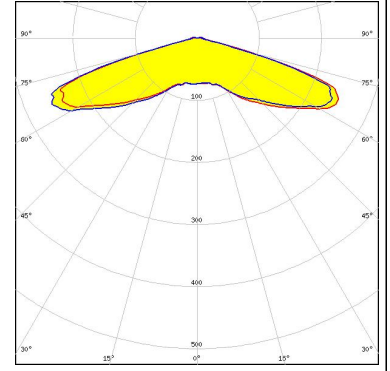


SCIOLUX

LED XLE-S22XHP50B (XHP50.2)
 FWHM / FWTM 151.0° / 159.0°
 Efficiency 94 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

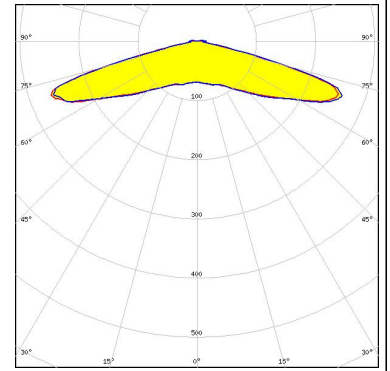

SEOUL SEMICONDUCTOR


LED Z8Y22
 FWHM / FWTM Asymmetric
 Efficiency 94 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 4
 Light colour White
 Required components:

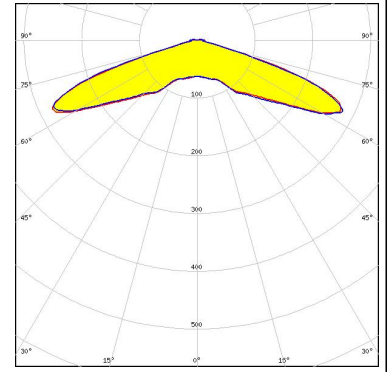

PHOTOMETRIC DATA (SIMULATED):




LED: Bridgelux SMD 5050
 FWHM / FWTM: Asymmetric
 Efficiency: 94 %
 Peak intensity: 0.4 cd/lm
 LEDs/each optic: 1
 Light colour: White
 Required components:

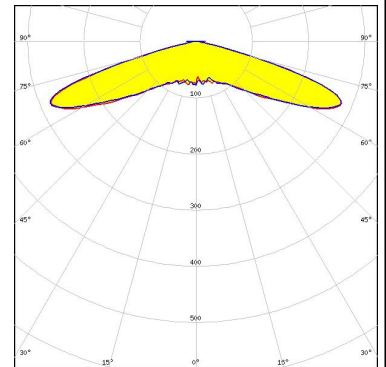


CITIZEN


LED: CLU700/701/702
 FWHM / FWTM: Asymmetric
 Efficiency: 93 %
 Peak intensity: 0.5 cd/lm
 LEDs/each optic: 1
 Light colour: White
 Required components:
 Bender Wirth: 434 Typ 2x2MX HV

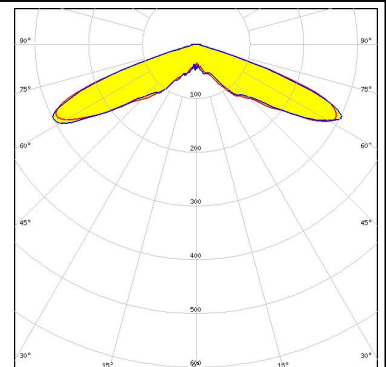

LED: MHB-A/B
 FWHM / FWTM: 152.0° / 160.0°
 Efficiency: 95 %
 Peak intensity: 0.4 cd/lm
 LEDs/each optic: 1
 Light colour: White
 Required components:

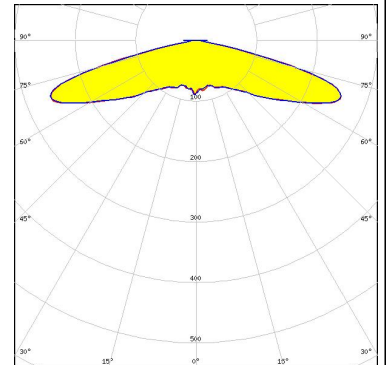


LED: XHP70.3 HD
 FWHM / FWTM: 152.0° / 160.0°
 Efficiency: 94 %
 Peak intensity: 0.4 cd/lm
 LEDs/each optic: 1
 Light colour: White
 Required components:

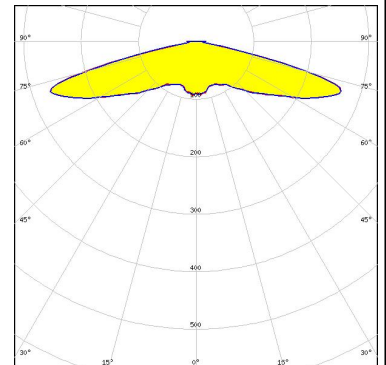


PHOTOMETRIC DATA (SIMULATED):




LED XT-E
 FWHM / FWTM 148.0° / 180.0°
 Efficiency 93 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

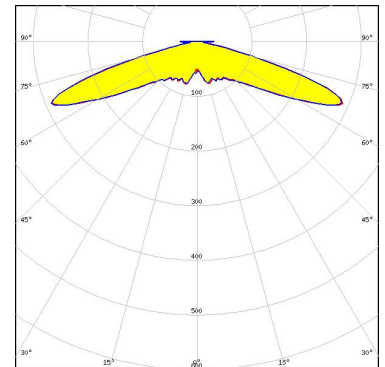


LED LUXEON 5050 Round LES
 FWHM / FWTM 146.0° / 154.0°
 Efficiency 95 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

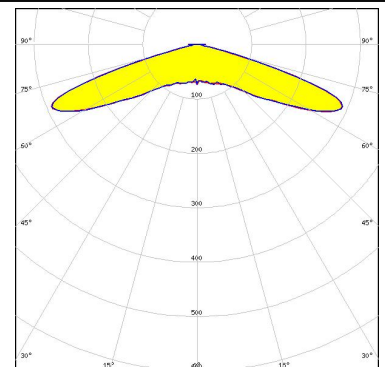

LED LUXEON 7070
 FWHM / FWTM 150.0° / 158.0°
 Efficiency 95 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

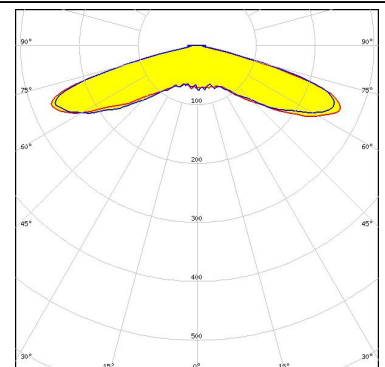


LED NFMW48xA
 FWHM / FWTM Asymmetric
 Efficiency 94 %
 Peak intensity 45 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

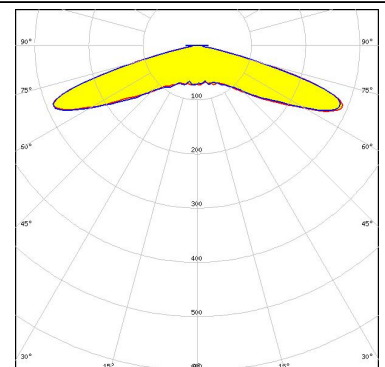


PHOTOMETRIC DATA (SIMULATED):




LED NV4WB35AM
 FWHM / FWTM 148.0° / 162.0°
 Efficiency 95 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

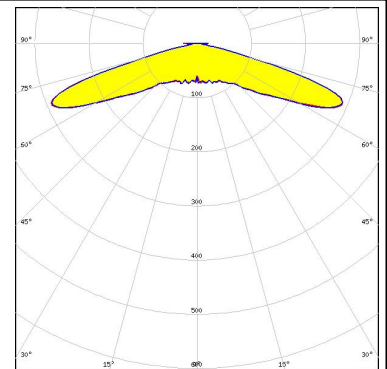


LED NVSxE21A
 FWHM / FWTM 148.0° / 156.0°
 Efficiency 95 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 9
 Light colour White
 Required components:

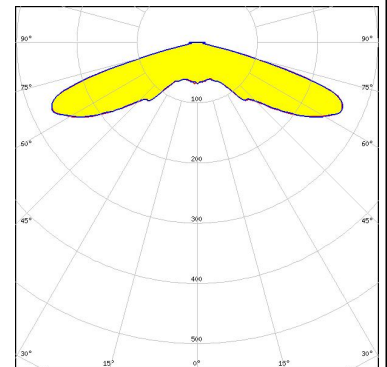

LED NVSxE21A
 FWHM / FWTM 146.0° / 154.0°
 Efficiency 95 %
 Peak intensity 0.5 cd/lm
 LEDs/each optic 4
 Light colour White
 Required components:

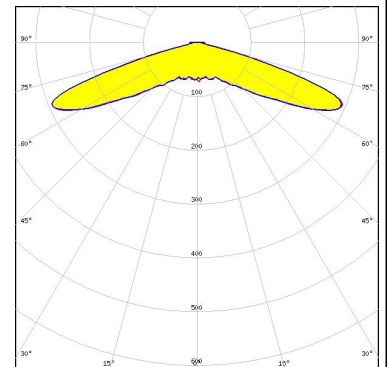

LED OSCONIQ P 7070
 FWHM / FWTM Asymmetric
 Efficiency 94 %
 Peak intensity 0.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

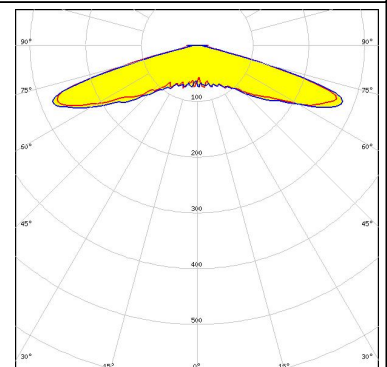

PHOTOMETRIC DATA (SIMULATED):



GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)