

RONDA-WW-C

~60° wide beam with holder C compatible with LEDiL HEKLA

TECHNICAL SPECIFICATIONS:

Dimensions	Ø 53.9 mm
Height	16.9 mm
Fastening	socket
ROHS compliant	yes ⓘ

MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Finish
F15282_RONDA-WW	Single lens	PMMA	clear	
F15635_RONDA-HLD-C	Holder	PC	white	


ORDERING INFORMATION:

Quantities for one set:

Single lens	1
Holder	1



Component		Qty in box	MOQ	MPQ	Box weight (kg)
F15282_RONDA-WW » Box size: 480 x 280 x 300 mm	Single lens	420	120	30	7.2
F15635_RONDA-HLD-C » Box size: 480 x 280 x 300 mm	Holder	420	120	30	4.1

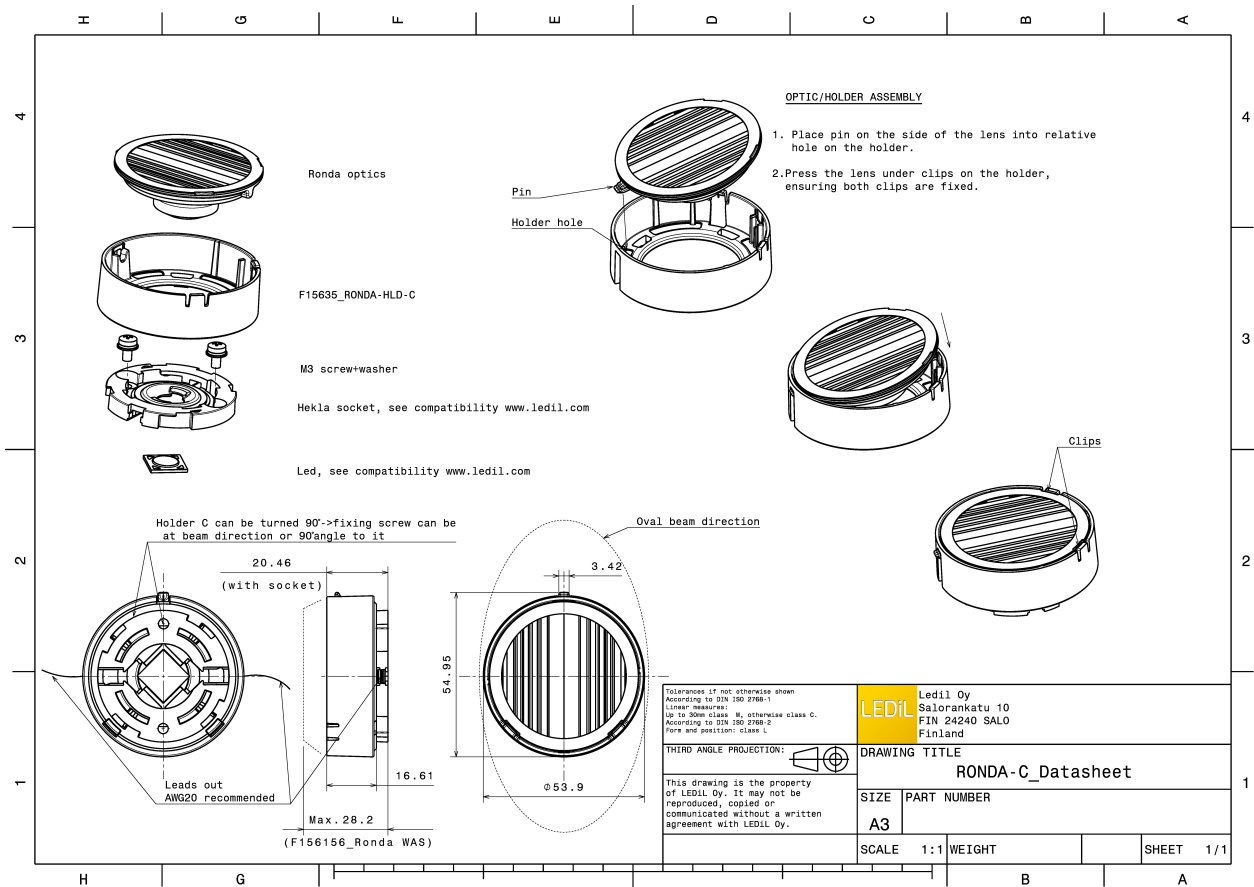


See also our general installation guide: www.ledil.com/installation_guide



PHOTOMETRIC DATA (MEASURED):




LED V11 HD Gen 8
FWHM / FWTM 57.0° / 89.0°
Efficiency 89 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:
Bender Wirth: 633d Hekla

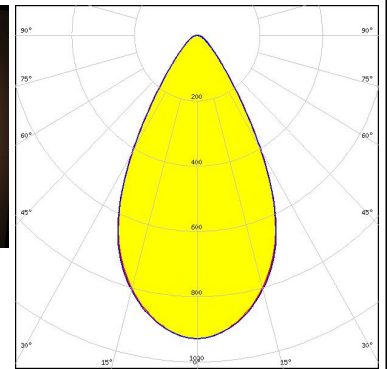


LED V4 HD Gen 7
FWHM / FWTM 59.0° / 82.0°
Efficiency 93 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15253_HEKLA-SOCKET-A

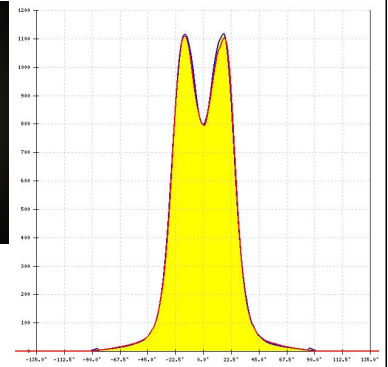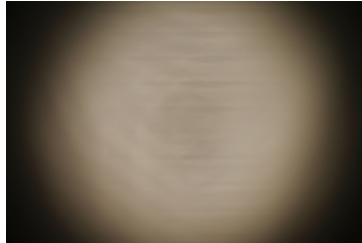

LED V6 Gen6
FWHM / FWTM 53.0° / 78.0°
Efficiency 92 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15253_HEKLA-SOCKET-A

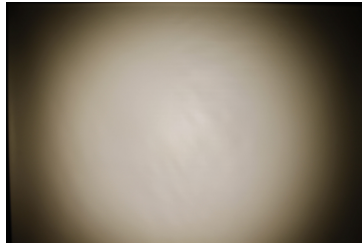


LED V6 HD Gen 7
FWHM / FWTM 58.0° / 84.0°
Efficiency 92 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C

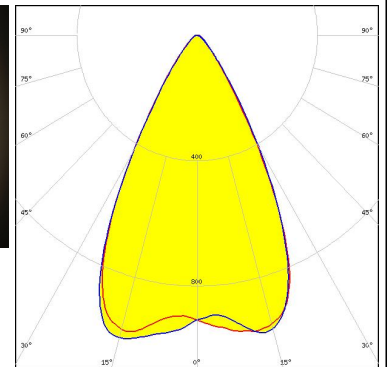


PHOTOMETRIC DATA (MEASURED):





LED V9 HD Gen7
FWHM / FWTM 55.0° / 83.0°
Efficiency 90 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15859_HEKLA-SOCKET-I

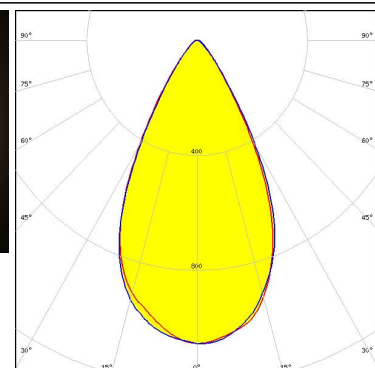



LED VERO10
FWHM / FWTM 57.0° / 86.0°
Efficiency 90 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15616_HEKLA-SOCKET-F

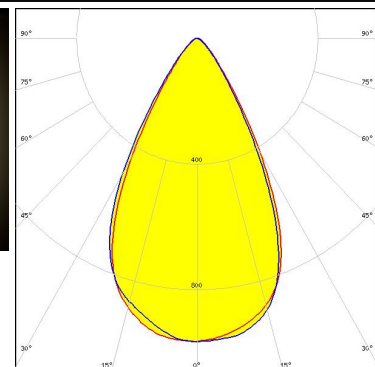

LED Vesta DTW 13mm (21W)
FWHM / FWTM 67.0° / 105.0°
Efficiency 82 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour Tunable White
Required components:
C16142_HEKLA-SOCKET-K
Bender Wirth: 491 Typ L8

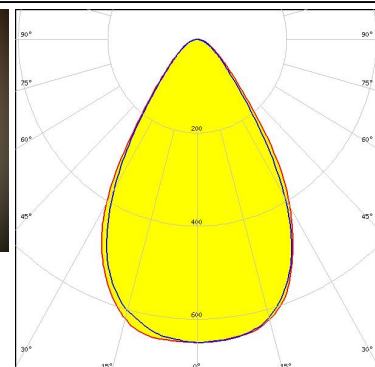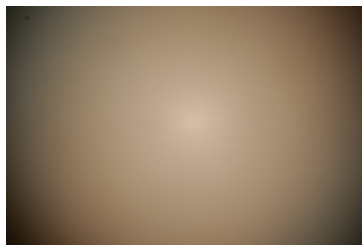

LED Vesta TW 13mm (25W) CSP
FWHM / FWTM 63.0° / 100.0°
Efficiency 83 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C16142_HEKLA-SOCKET-K
Bender Wirth: 492 Typ L8

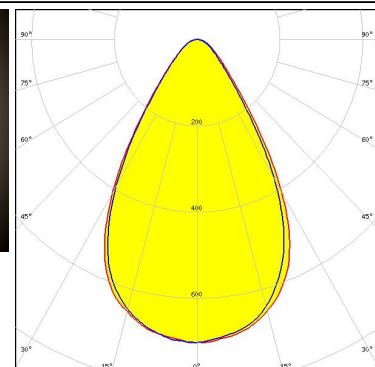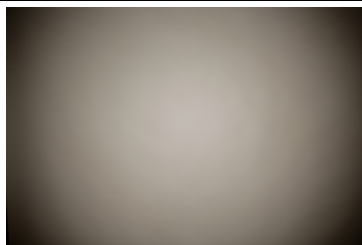


PHOTOMETRIC DATA (MEASURED):



LED Vesta TW 6mm DP
FWHM / FWTM 55.0° / 77.0°
Efficiency 87 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C16142_HEKLA-SOCKET-K
Bender Wirth: 504 Typ L8





LED Vesta TW 9mm (12W) CSP
FWHM / FWTM 53.0° / 80.0°
Efficiency 88 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C16142_HEKLA-SOCKET-K

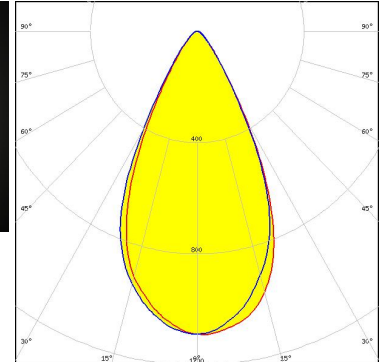



CITIZEN

LED CLC020 Series (Dim-To-Warm)
FWHM / FWTM 51.0° / 78.0°
Efficiency 87 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C16142_HEKLA-SOCKET-K

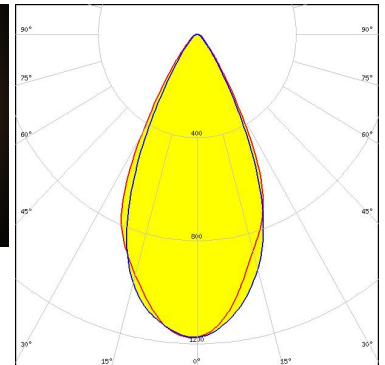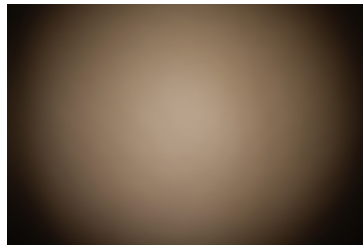

CITIZEN


LED CLL02x/CLU02x (LES10)
FWHM / FWTM 57.0° / 87.0°
Efficiency 91 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C

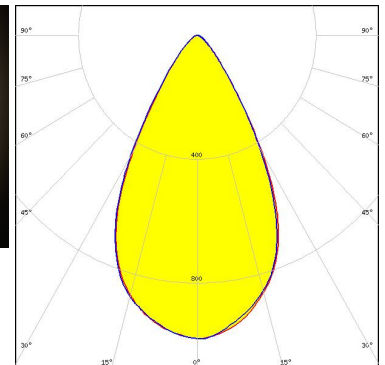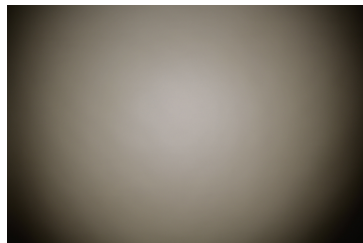

PHOTOMETRIC DATA (MEASURED):



CITIZEN

LED CLU700/701/702
FWHM / FWTM 57.0° / 82.0°
Efficiency 91 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C

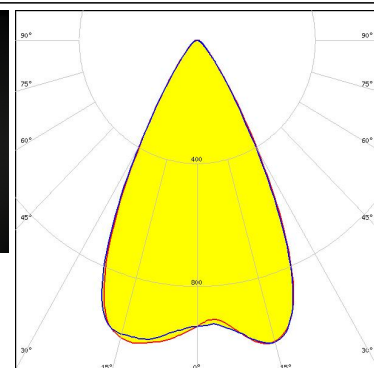



CITIZEN

LED LCN-C01B (Tunable White)
FWHM / FWTM 53.0° / 81.0°
Efficiency 88 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C16142_HEKLA-SOCKET-K

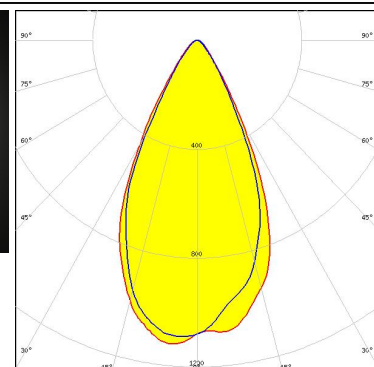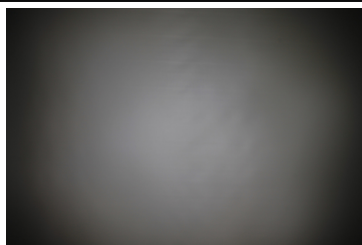



CREE LED

LED CMA1516
FWHM / FWTM 56.0° / 87.0°
Efficiency 92 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15256_HEKLA-SOCKET-D

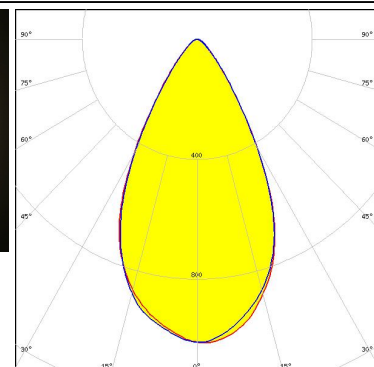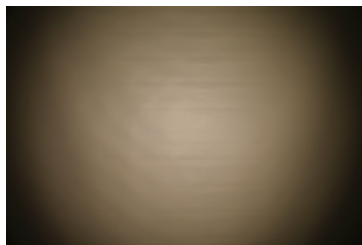

CREE LED



LED CMA1825
FWHM / FWTM 63.0° / 99.0°
Efficiency 90 %
Peak intensity 0.8 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15254_HEKLA-SOCKET-B

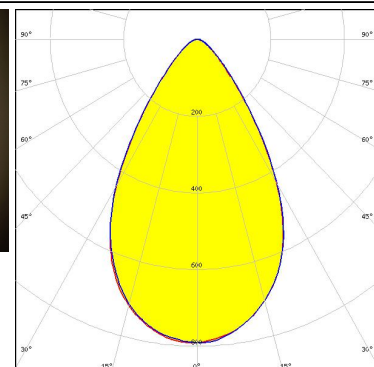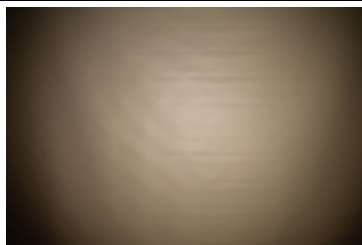

PHOTOMETRIC DATA (MEASURED):



CREE LED

LED CMT14xx
FWHM / FWTM 56.0° / 86.0°
Efficiency 91 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C

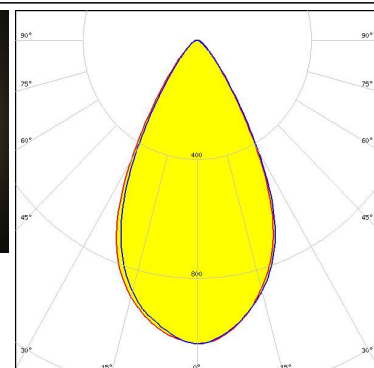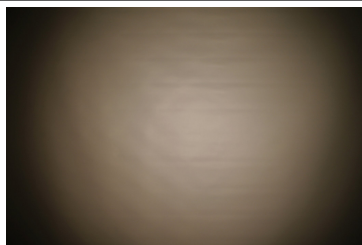



CREE LED

LED CMT19xx
FWHM / FWTM 67.0° / 110.0°
Efficiency 86 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15859_HEKLA-SOCKET-I

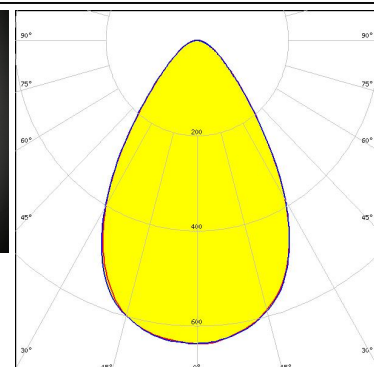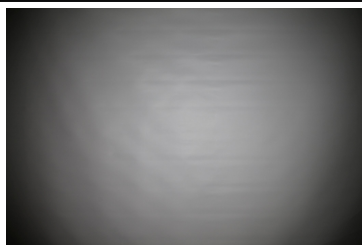



CREE LED

LED CXA/B 13xx
FWHM / FWTM 60.0° / 85.0°
Efficiency 92 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15956_HEKLA-SOCKET-J

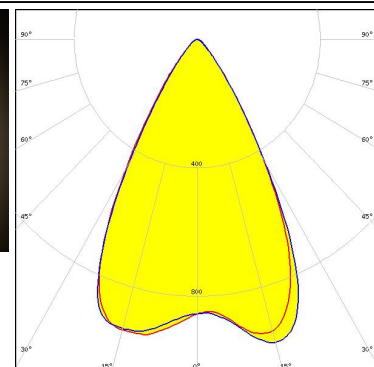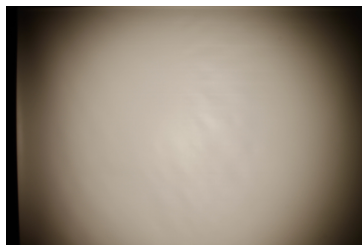

CREE LED



LED CXA/B 15xx
FWHM / FWTM 57.0° / 84.0°
Efficiency 92 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15256_HEKLA-SOCKET-D

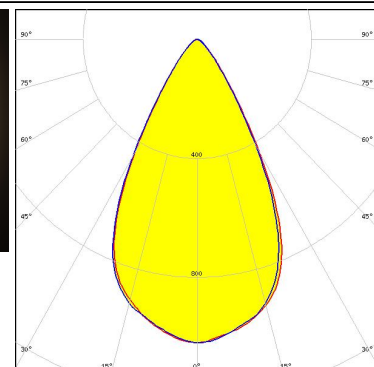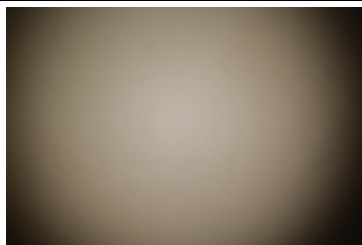

PHOTOMETRIC DATA (MEASURED):


LUMILEDS

LED LUXEON CX Plus CoB L08 (Gen2)
FWHM / FWTM 66.0° / 108.0°
Efficiency 86 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:
Bender Wirth: 637a Hekla

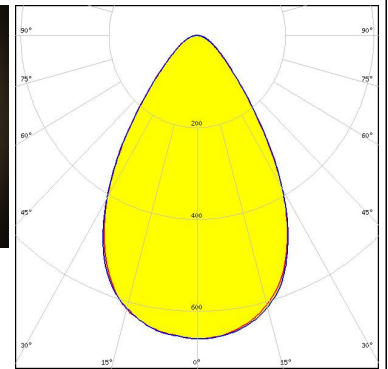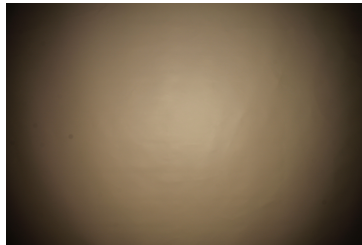



LUMILEDS

LED LUXEON CoB 1202HD
FWHM / FWTM 56.0° / 83.0°
Efficiency 92 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15848_HEKLA-SOCKET-G

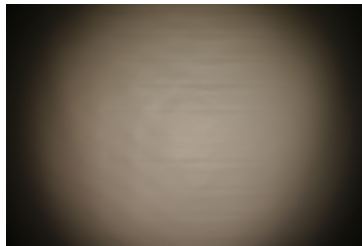



LUMILEDS

LED LUXEON CoB 1202s
FWHM / FWTM 60.0° / 85.0°
Efficiency 92 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15848_HEKLA-SOCKET-G

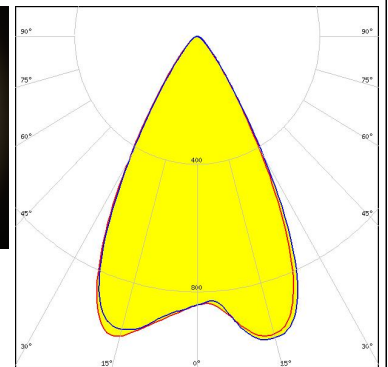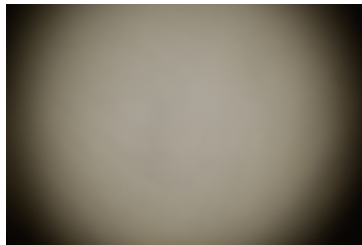

LUMILEDS



LED LUXEON CoB 1204HD
FWHM / FWTM 56.0° / 85.0°
Efficiency 92 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15858_HEKLA-SOCKET-H

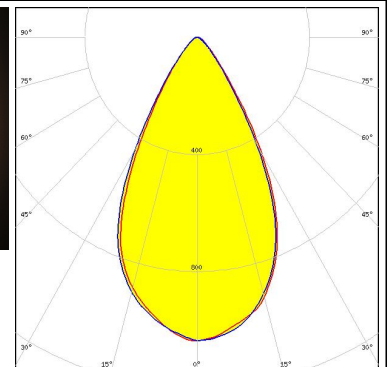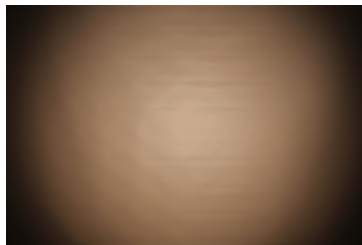

PHOTOMETRIC DATA (MEASURED):



LUMILEDS

LED LUXEON CoB 1205HD
FWHM / FWTM 58.0° / 90.0°
Efficiency 90 %
Peak intensity 0.9 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15858_HEKLA-SOCKET-H

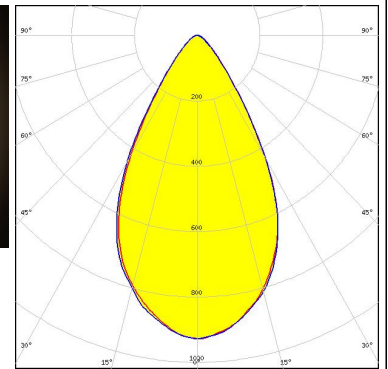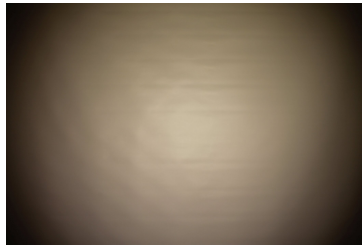


LUMILEDS

LED LUXEON CX Plus CoB - HD S01H4
FWHM / FWTM 51.0° / 75.0°
Efficiency 90 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:
Bender Wirth: 634c Hekla

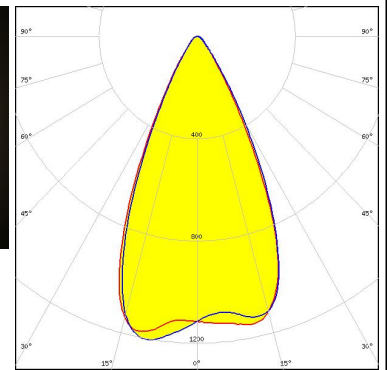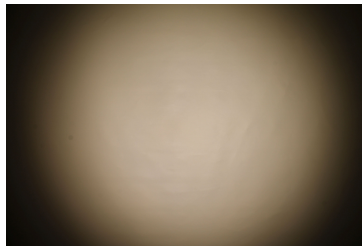



LUMILEDS

LED LUXEON CX Plus CoB - HD S01H6 / HD S02H6
FWHM / FWTM 57.0° / 82.0°
Efficiency 91 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
Bender Wirth: 634c Hekla

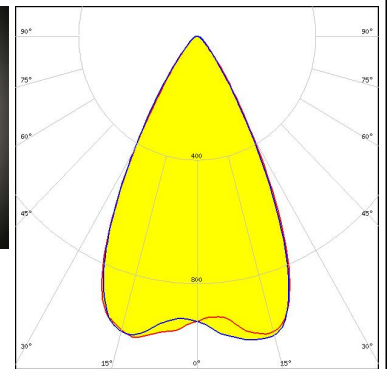

LUMILEDS



LED LUXEON CX Plus CoB - HD S04H9
FWHM / FWTM 50.0° / 79.0°
Efficiency 90 %
Peak intensity 1.2 cd/lm
LEDs/each optic 1
Light colour White
Required components:
Bender Wirth: 634c Hekla

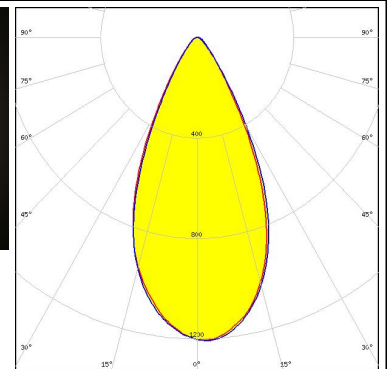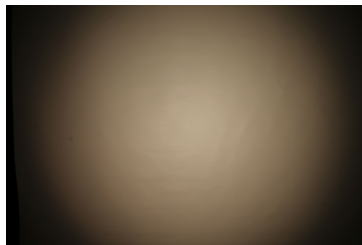

PHOTOMETRIC DATA (MEASURED):


LUMILEDS

LED LUXEON CX Plus CoB L04 / L05 (Gen2)
 FWHM / FWTM 58.0° / 91.0°
 Efficiency 90 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 Bender Wirth: 637a Hekla

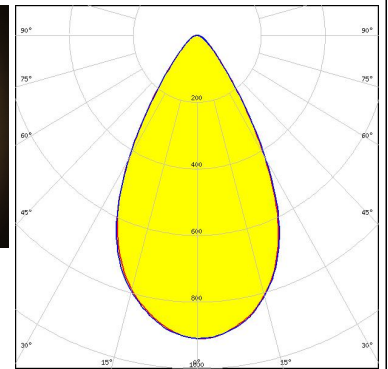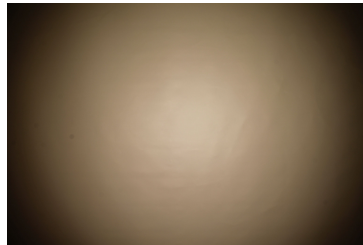



LUMILEDS

LED LUXEON CX Plus CoB M02 / M03 (Gen2)
 FWHM / FWTM 55.0° / 82.0°
 Efficiency 91 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 Bender Wirth: 641a Hekla

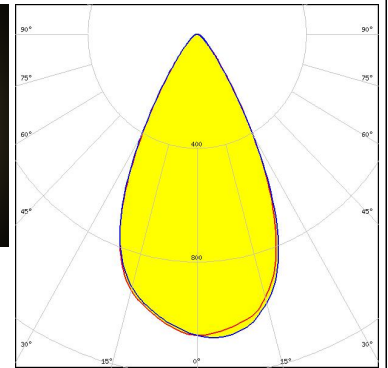



LUMILEDS

LED LUXEON CX Plus CoB S01 (Gen2)
 FWHM / FWTM 56.0° / 80.0°
 Efficiency 92 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 Bender Wirth: 634c Hekla

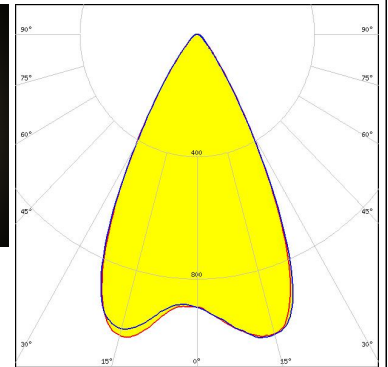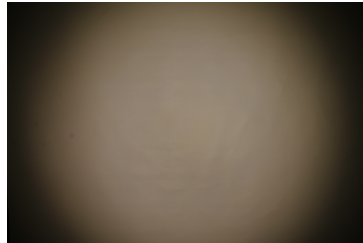

LUMINUS



LED CDM-14 (Dim-To-Warm)
 FWHM / FWTM 65.0° / 102.0°
 Efficiency 82 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C16142_HEKLA-SOCKET-K
 Bender Wirth: 491 Typ L8

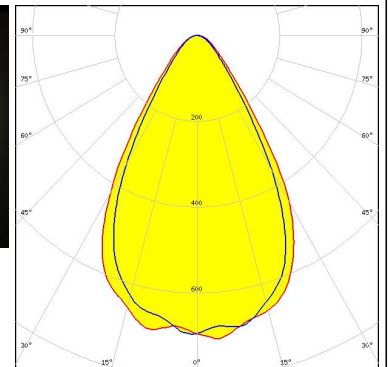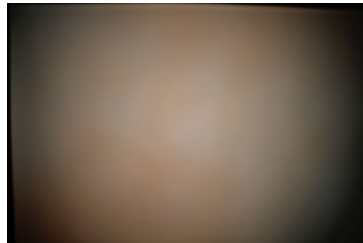


PHOTOMETRIC DATA (MEASURED):





LED CDM-6 (Dim-To-Warm)
 FWHM / FWTM 55.0° / 80.0°
 Efficiency 88 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C16142_HEKLA-SOCKET-K
 Bender Wirth: 490 Typ L8

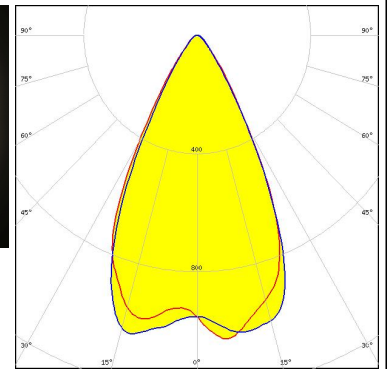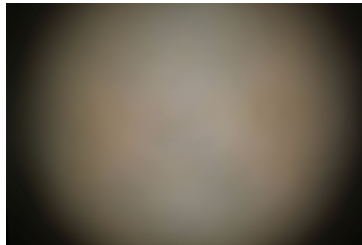



LED CDM-9 (Dim-To-Warm)
 FWHM / FWTM 55.0° / 82.0°
 Efficiency 87 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C16142_HEKLA-SOCKET-K
 Bender Wirth: 490 Typ L8

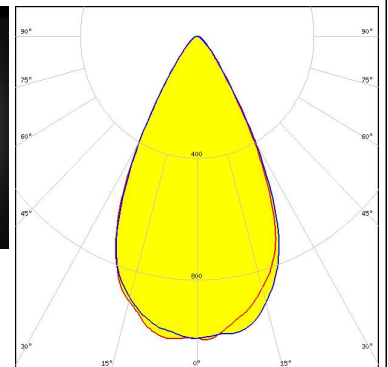

LED CxM-14 (19x19)
 FWHM / FWTM 66.0° / 105.0°
 Efficiency 85 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15859_HEKLA-SOCKET-I

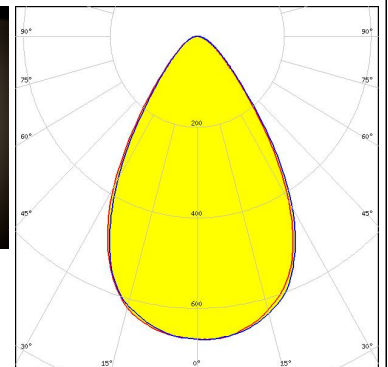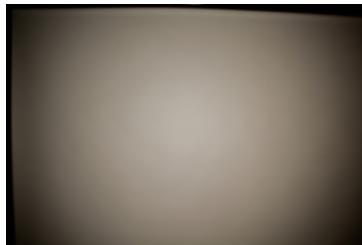



LED CXM-4
 FWHM / FWTM 47.0° / 68.0°
 Efficiency 89 %
 Peak intensity 1.4 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15255_HEKLA-SOCKET-C

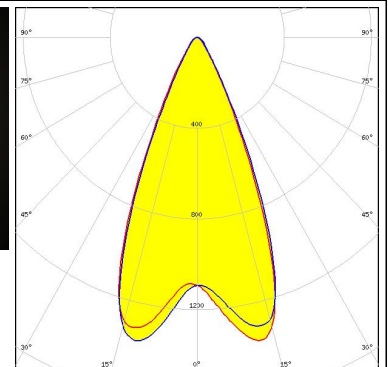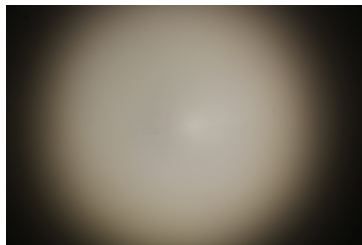



PHOTOMETRIC DATA (MEASURED):





LED CxM-9 (13.5x13.5)
 FWHM / FWTM 57.0° / 85.0°
 Efficiency 91 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15255_HEKLA-SOCKET-C

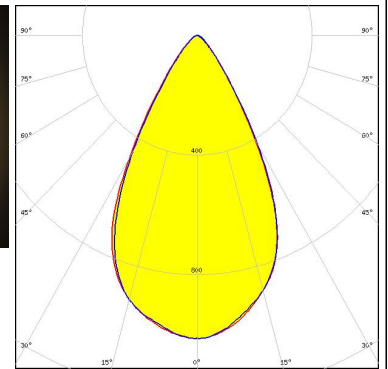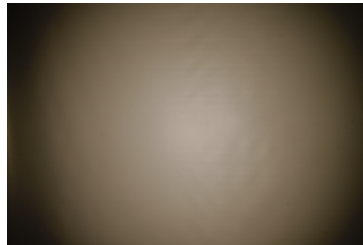



LED NJCWL024Z-V1MT: COB L-Type Tunable White
 FWHM / FWTM 52.0° / 77.0°
 Efficiency 85 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C16142_HEKLA-SOCKET-K
 Bender Wirth: 497 Typ L8

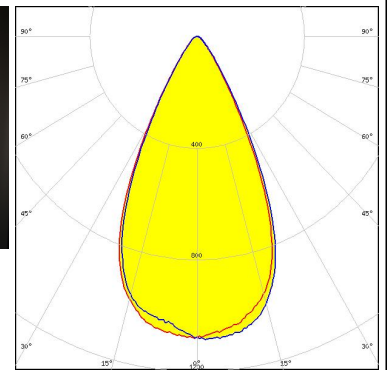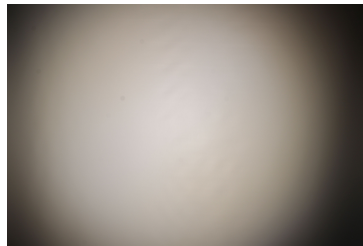

LED NVCWJ024Z-V1MT: COB J-Type Tunable White
 FWHM / FWTM 56.0° / 85.0°
 Efficiency 87 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C16142_HEKLA-SOCKET-K
 Bender Wirth: 498 Typ L8

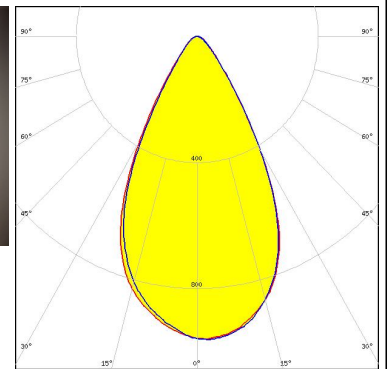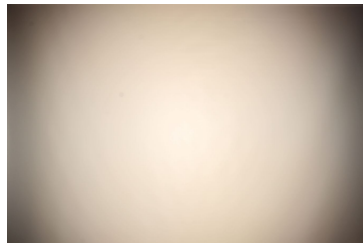

LED Fortimo SLM L09 CoB
 FWHM / FWTM 56.0° / 85.0°
 Efficiency 91 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15858_HEKLA-SOCKET-H

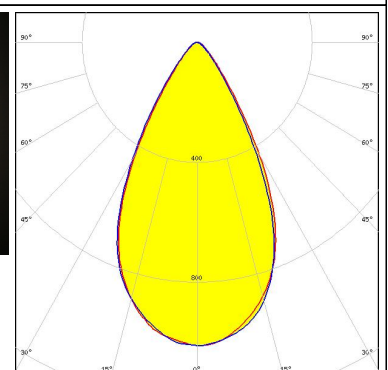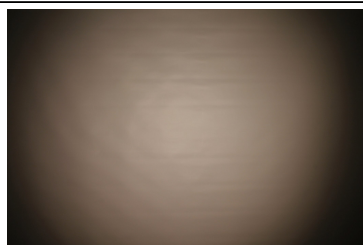

PHOTOMETRIC DATA (MEASURED):



PHILIPS

LED Fortimo SLM L13 CoB
 FWHM / FWTM 63.0° / 103.0°
 Efficiency 84 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C16142_HEKLA-SOCKET-K
 Bender Wirth: 432 Typ L8





PHILIPS

LED Fortimo SLM L13 CoB
 FWHM / FWTM 63.0° / 103.0°
 Efficiency 84 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C16142_HEKLA-SOCKET-K
 Bender Wirth: 432 Typ L8

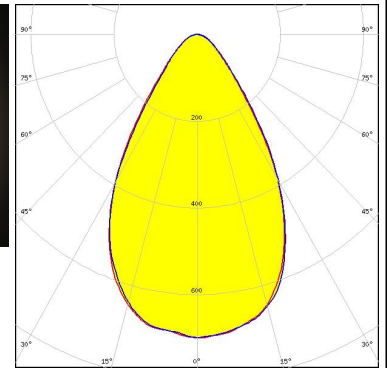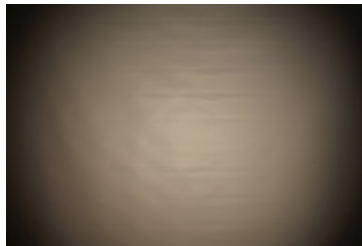


SAMSUNG

LED LC003D / LC006D / LC009D / LC013D
 FWHM / FWTM 58.0° / 88.0°
 Efficiency 92 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15255_HEKLA-SOCKET-C

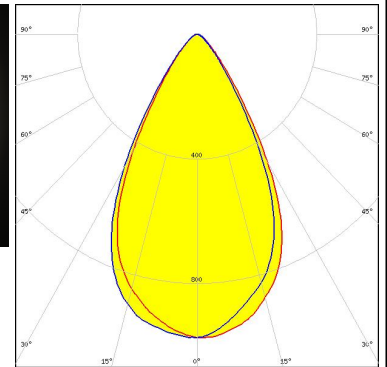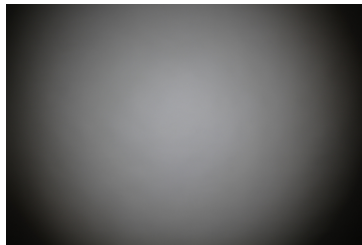

SAMSUNG



LED LC010C
 FWHM / FWTM 61.0° / 86.0°
 Efficiency 91 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 F15848_HEKLA-SOCKET-G

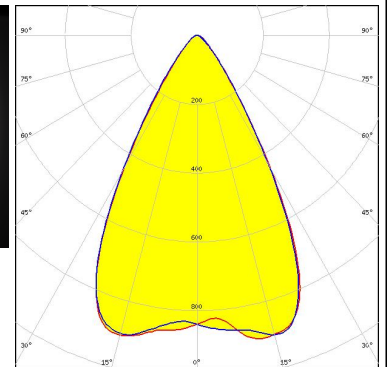

PHOTOMETRIC DATA (MEASURED):



SAMSUNG

LED LC010C G2
FWHM / FWTM 59.0° / 82.0°
Efficiency 91 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C

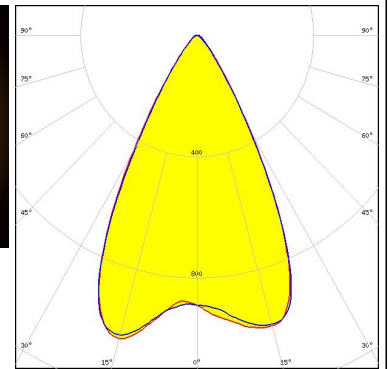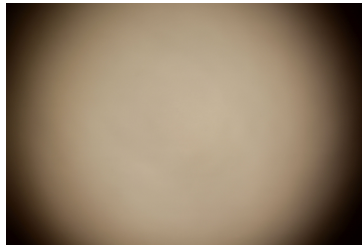



SAMSUNG

LED LC010T (Tunable White)
FWHM / FWTM 54.0° / 80.0°
Efficiency 88 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour Tunable White
Required components:
C16142_HEKLA-SOCKET-K
Bender Wirth: 501 Typ L8

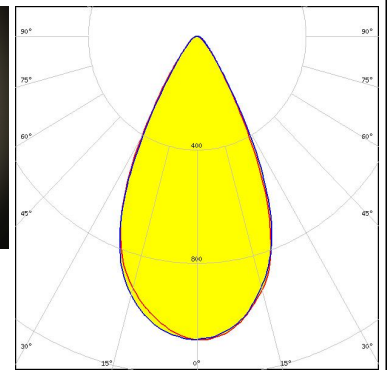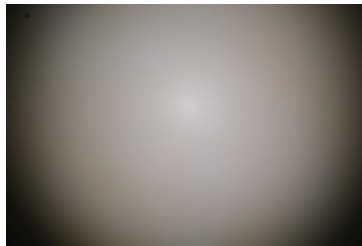



SAMSUNG

LED LC016D / LC019D / LC026D / LC033D
FWHM / FWTM 67.0° / 112.0°
Efficiency 84 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15859_HEKLA-SOCKET-I

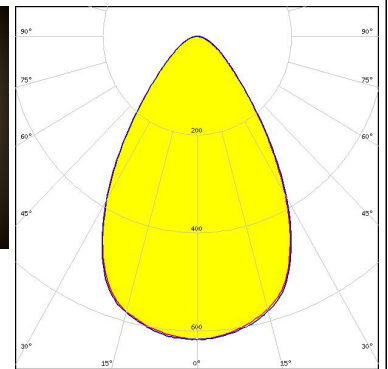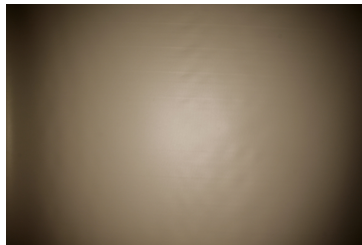

SAMSUNG



LED LC020C
FWHM / FWTM 58.0° / 86.0°
Efficiency 92 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15848_HEKLA-SOCKET-G

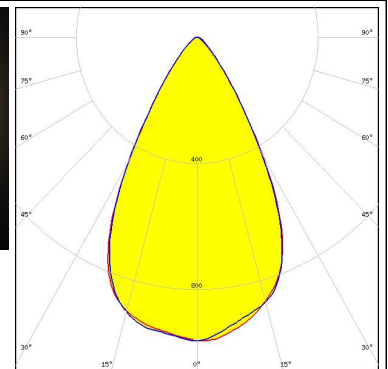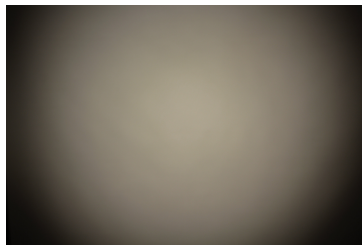

PHOTOMETRIC DATA (MEASURED):


SAMSUNG

LED LC020C G2
FWHM / FWTM 56.0° / 82.0°
Efficiency 90 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15859_HEKLA-SOCKET-I

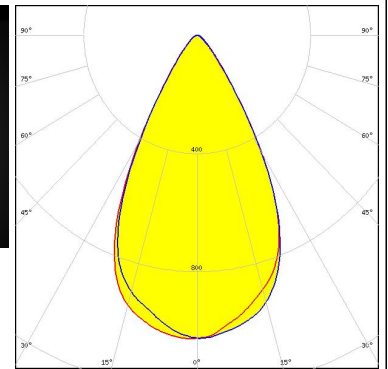
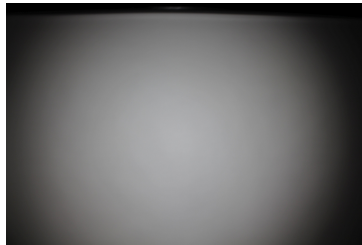


SAMSUNG



LED LC020T (Tunable white)
FWHM / FWTM 63.0° / 98.0°
Efficiency 85 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour Tunable White
Required components:
C16142_HEKLA-SOCKET-K
Bender Wirth: 501 Typ L8

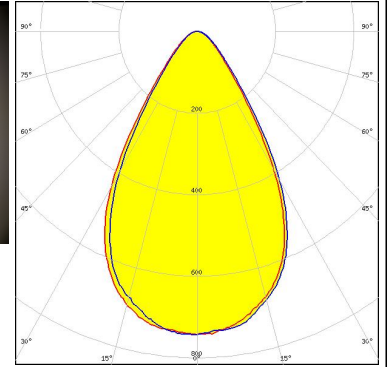

LED MJT COB LES 6
FWHM / FWTM 58.0° / 82.0°
Efficiency 89 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C

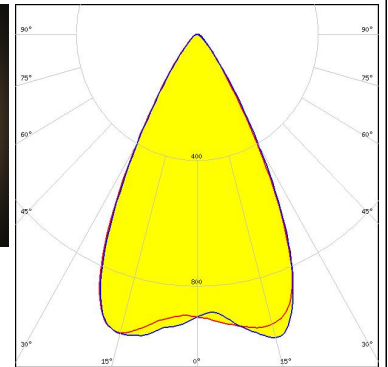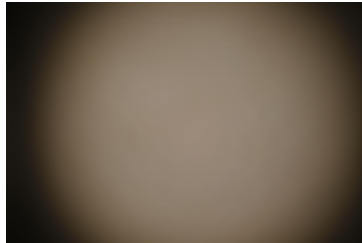



LED MJT COB LES 9.8
FWHM / FWTM 57.0° / 85.0°
Efficiency 87 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C

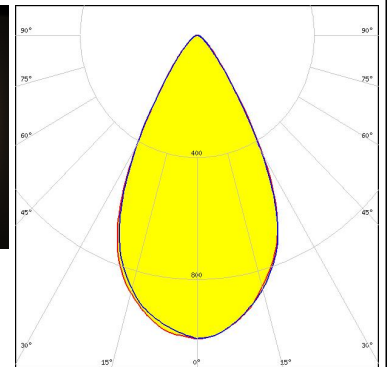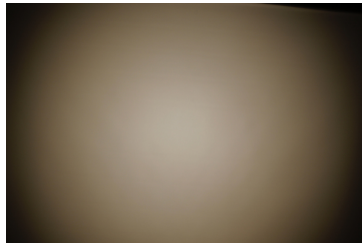

PHOTOMETRIC DATA (MEASURED):



TRIDONIC

LED SLE G7 LES09
FWHM / FWTM 56.0° / 83.0°
Efficiency 91 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C

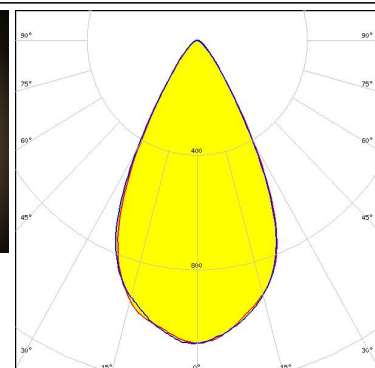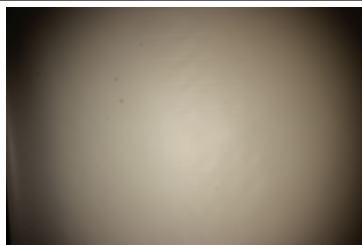



TRIDONIC

LED SLE G7 LES13
FWHM / FWTM 65.0° / 101.0°
Efficiency 87 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15859_HEKLA-SOCKET-I

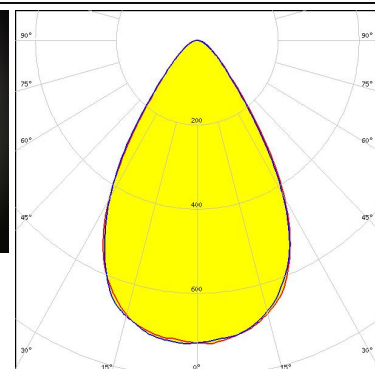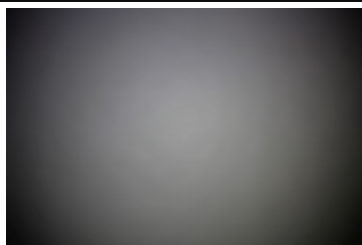



TRIDONIC

LED SLE G7 LES15
FWHM / FWTM 69.0° / 113.0°
Efficiency 84 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15859_HEKLA-SOCKET-I

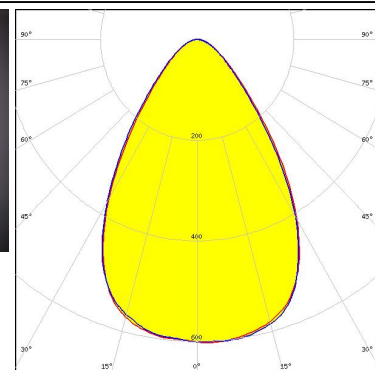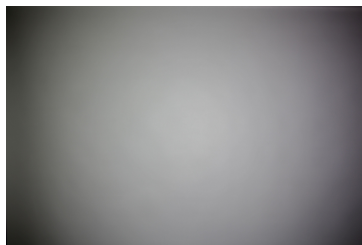

XICATO



LED XOB 14.5 mm
FWHM / FWTM 66.0° / 107.0°
Efficiency 85 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15859_HEKLA-SOCKET-I

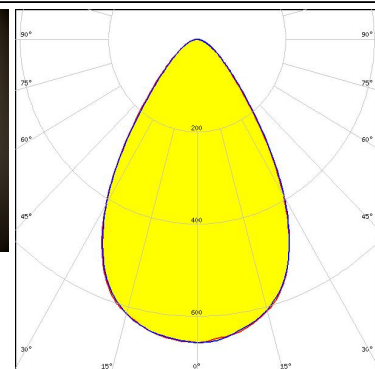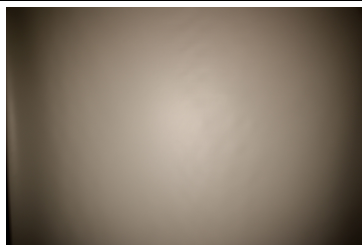

PHOTOMETRIC DATA (MEASURED):



XICATO

LED XOB 9.8 mm
FWHM / FWTM 56.5° / 86.0 + 84.5°
Efficiency 91 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15255_HEKLA-SOCKET-C

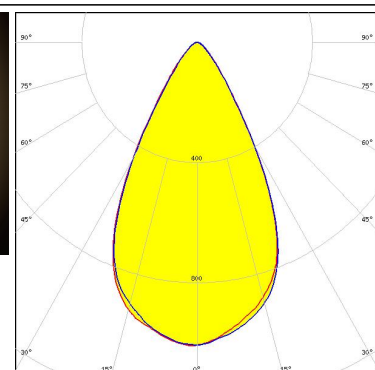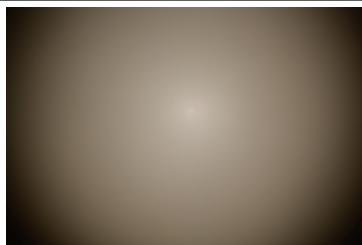

XICATO


LED XTM - 19mm LES
FWHM / FWTM 68.0° / 120.0°
Efficiency 84 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C16058_XTM-ADAPTER-50-C

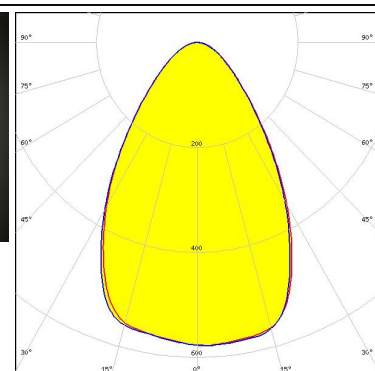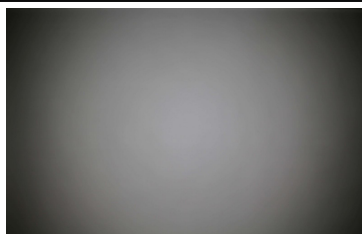

PHOTOMETRIC DATA (SIMULATED):


CITIZEN

LED CLL03x/CLU03x
FWHM / FWTM 63.0° / 104.0°
Efficiency 83 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15859_HEKLA-SOCKET-I

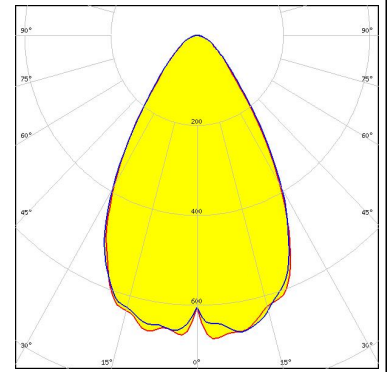



NICHIA

LED COB T-Type
FWHM / FWTM 56.0° / 76.0°
Efficiency 85 %
Peak intensity 1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F15848_HEKLA-SOCKET-G

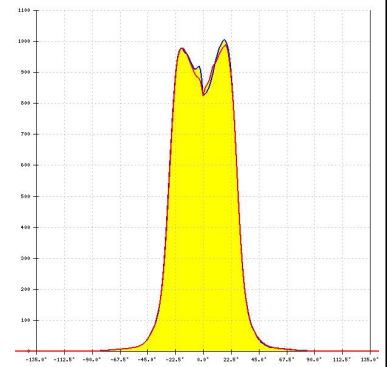



SAMSUNG

LED LC003D / LC006D / LC009D / LC013D
FWHM / FWTM 55.0° / 79.0°
Efficiency 88 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F17435_HEKLA-G2-C

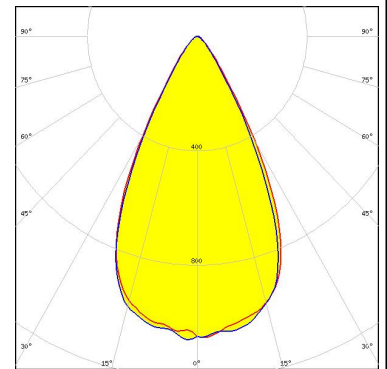

SAMSUNG



LED LC003D / LC006D / LC009D / LC013D
FWHM / FWTM 56.0° / 80.0°
Efficiency 89 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F17435_HEKLA-G2-C

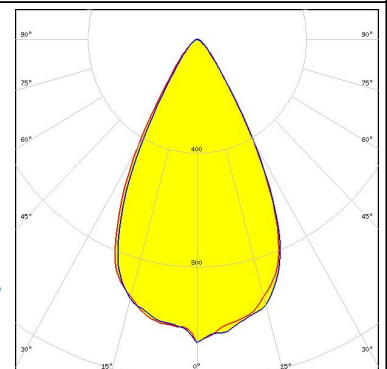

PHOTOMETRIC DATA (SIMULATED):


SAMSUNG

LED LC010C G2
FWHM / FWTM 55.0° / 76.0°
Efficiency 91 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F17435_HEKLA-G2-C

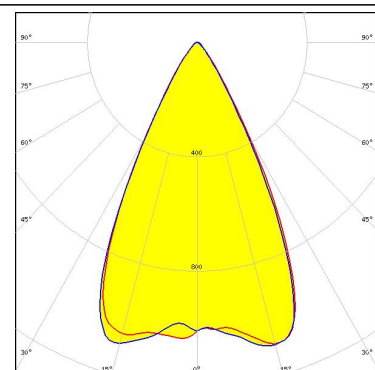

SAMSUNG

LED LC020C G2
FWHM / FWTM 55.0° / 79.0°
Efficiency 90 %
Peak intensity 1.1 cd/lm
LEDs/each optic 1
Light colour White
Required components:
F17435_HEKLA-G2-C

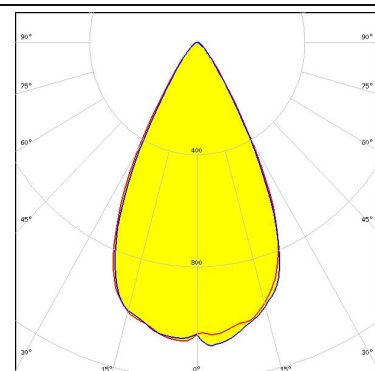

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)